

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 August 2001 (30.08.2001)

PCT

(10) International Publication Number
WO 01/62382 A2

(51) International Patent Classification⁷: **B01J 29/00**

(21) International Application Number: **PCT/US01/06011**

(22) International Filing Date: 23 February 2001 (23.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/511,943 24 February 2000 (24.02.2000) US
09/615,545 13 July 2000 (13.07.2000) US

(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Dr., Baytown, TX 77520-5200 (US).

(72) Inventors: **XU, Teng**; 13422 Scenic Glade Drive, Houston, TX 77059 (US). **WHITE, Jeffrey, L.**; 1239 E. Spring Hill Court, Cary, NC 27511 (US).

(74) Agents: **KELLER, Bradley, A.**; ExxonMobil Chemical Company, P.O. Box 2149, Baytown, TX 77522-2149 et al. (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CATALYST PRETREATMENT IN AN OXYGENATE TO OLEFINS REACTION SYSTEM

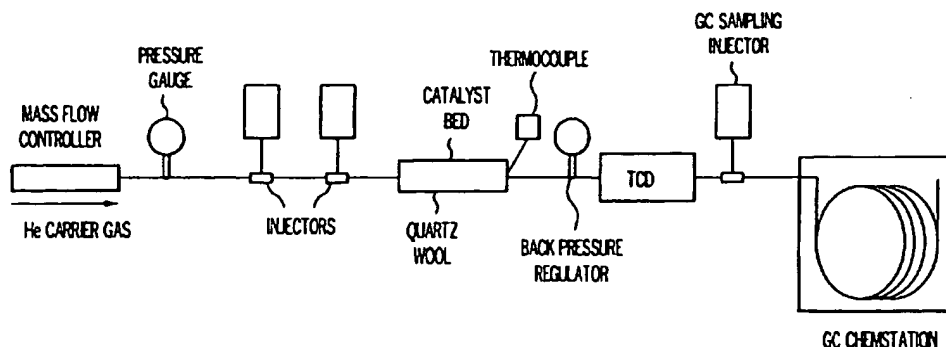

(57) Abstract: Disclosed is a crystalline silicoaluminophosphate molecular sieve comprising a porous framework structure and at least one single ring aromatic compound within the porous framework structure. The silicoaluminophosphate molecular sieve is used to convert oxygenate feedstock to olefin product. The olefin product is high in ethylene and propylene content, with a high selectivity to ethylene. The silicoaluminophosphate molecular sieve can be included with a binder and other materials in finished catalyst form.

WO 01/62382 A2

- 1 -

CATALYST PRETREATMENT IN AN OXYGENATE TO OLEFINS REACTION SYSTEM

5

This invention relates to introducing a hydrocarbon into the porous framework of a silicoaluminophosphate molecular sieve. More specifically, this invention is to a silicoaluminophosphate molecular sieve which contains an aromatic compound, and a method for forming said aromatic compound within the porous framework of the silicoaluminophosphate molecular sieve.

10

Demand for polyolefins, e.g., polyethylene and polypropylene, has been steadily increasing. It is projected that the increased demand for polyolefins will outpace the availability of raw materials, e.g., ethylene and propylene, from which polyolefins can be made.

15

Olefins which are used to make polyolefins have been traditionally produced from petroleum feedstocks by either catalytic or steam cracking of the petroleum. The cost of petroleum cracking has steadily increased, however, making it important to find alternative feedstock sources for olefins.

20

Oxygenates are a promising alternative feedstock for making olefins. Particularly promising oxygenate feedstocks are alcohols, such as methanol and ethanol, dimethyl ether, methyl ethyl ether, diethyl ether, dimethyl carbonate, and methyl formate. Many of these oxygenates can be produced by fermentation, or from synthesis gas derived from natural gas, petroleum liquids, carbonaceous materials such as coal, recycled plastics, municipal wastes, or any appropriate organic material. Because of the wide variety of sources, oxygenates have promise as an economical source for olefin production.

25

One way in which olefins can be made is by catalytic conversion. In U.S. Patent No. 4,499,327, for example, a catalytic process for converting methanol to olefins is disclosed. The catalyst used in that process contains a silicoaluminophosphate molecular sieve.

30

Of course, it is highly desirable to convert as much of the oxygenate feedstock as possible into as much olefin product as possible. Various methods of doing such have been described. For example, U.S. Patent No. 4,677,242

- 2 -

describes a method of increasing the amount of ethylene and propylene produced from the catalytic conversion of methanol by adding an aromatic diluent to the methanol. The catalyst that is used in the process contains a silicoaluminophosphate molecular sieve. The use of the diluent is considered to
5 result in an increased amount of ethylene product.

U.S. Patent No. 4,499,314 discloses a catalytic process for converting methanol to ethylene and para-xylene. The catalyst that is used is ZSM-5. Promoters are used to promote either the formation of aromatics products or olefins products. Benzene, toluene and para-xylene are preferred aromatics
10 promoters. Ethylene, propylene and butenes are preferred olefin promoters.

There remains, nevertheless, a desire to improve the economic attractiveness of the oxygenate conversion process. Catalysts and methods to produce olefins from oxygenates are needed which increase the selectivity of the oxygenate conversion reaction, particularly to ethylene and propylene, without
15 resorting to adding costly product enhancing promoters. In particular, it is desirable to avoid using aromatic olefin promoters to boost selectivity to ethylene and propylene.

In order to overcome the various problems associated with providing large quantities of olefin product which can ultimately be used in the manufacture of
20 polyolefin compositions, this invention provides a crystalline silicoaluminophosphate molecular sieve comprising a porous framework structure. Within the porous framework structure there is contained a catalytically active integrated hydrocarbon co-catalyst.

In a preferred embodiment, the invention provides a method of making an
25 integrated hydrocarbon co-catalyst, comprising preparing an silicoaluminophosphate molecular sieve having a porous framework structure and contacting said silicoaluminophosphate with a hydrocarbon at conditions effective to form at least said integrated hydrocarbon co-catalyst within the porous framework, wherein said the silicoaluminophosphate has a catalytic activity index
30 for methanol conversion at 250°C and 275.8 kPa of at least 2.

The integrated hydrocarbon co-catalyst is a carbonaceous material such that the silicoaluminophosphate molecular sieve containing the integrated

- 3 -

hydrocarbon co-catalyst has a catalytic activity index for methanol conversion at 250°C and 275.8 kPa of at least 2. The catalytic activity index is k/k_{ini} , where k is the pseudo-first order rate constant for methanol conversion at 250°C and 275.8 kPa in the presence of the crystalline silicoaluminophosphate molecular sieve and
5 k_{ini} is the pseudo-first order rate constant for methanol conversion at 250°C and 275.8 kPa by injecting 1 pulse of 3 microliter of methanol in a pre-calcined crystalline silicoaluminophosphate molecular sieve activated by flowing He at 450°C for 1 hour.

In another embodiment, there is provided a catalyst for converting an
10 oxygenate feedstock to an olefin product. The catalyst comprises a crystalline silicoaluminophosphate molecular sieve having a porous framework structure, and a binder, wherein the porous framework structure contains an integrated hydrocarbon co-catalyst preferably containing a single ring aromatic compound.

In preferred embodiments of the silicoaluminophosphate molecular sieve
15 and catalyst, the aromatic composition exhibits a Solid State Nuclear Magnetic Resonance (SSNMR) spectra having a peak in the 18 ppm to 22 ppm region and a peak in the 125 ppm to 140 ppm region. Preferably, the aromatic composition is selected from the group consisting of alkyl substituted, single ring aromatics. Alternatively, if the intensity of the peak in the 18 ppm to 22 ppm region is
20 negligible, a peak near 128 ppm also indicates the material of this invention. Such a peak represents the presence of benzene, which has the desired effect on catalytic activity, as it rapidly reacts with the oxygenate to make alkylated single ring aromatics. More preferably, the silicoaluminophosphate molecular sieve is selected from the group consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-16,
25 SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures thereof. The most preferred silicoaluminophosphate molecular sieve is SAPO-34.

Also provided in this invention is a method for making an olefin product
30 from an oxygenate feedstock. The method comprises introducing a hydrocarbon into a porous framework of a silicoaluminophosphate molecular sieve under conditions effective to form an integrated hydrocarbon co-catalyst preferably

containing a single ring aromatic compound, and contacting the silicoaluminophosphate molecular sieve containing the integrated hydrocarbon co-catalyst with an oxygenate feedstock under conditions effective to convert the feedstock to an olefin product. The invention includes the olefin product made
5 according to the described method.

In another preferred embodiment, the invention provides a method wherein the olefin product is contacted with a polyolefin-forming catalyst under conditions effective to form a polyolefin. The invention includes the polyolefin product made according to the described method.

10 In a more preferred embodiment, there is provided an olefin composition. The olefin composition comprises C_2 to C_4 hydrocarbons such as ethylene, propylene and butene.

The present invention will be better understood by reference to the Detailed Description of the Invention when taken together with the attached
15 drawings, wherein:

FIG. 1 is a diagram of the pulse reactor for measuring the catalytic activity index;

FIG. 2 is a plot comparing conversion of methanol by contacting methanol to SAPO catalysts with and without an integrated hydrocarbon co-catalyst;

20 FIG. 3 is a plot of olefin selectivity for methanol reactions by contacting methanol to SAPO catalysts with and without an integrated hydrocarbon co-catalyst;

FIG. 4 is a SSNMR spectrum of SAPO-34 catalyst containing alkylated single ring aromatics within the porous framework; and

25 FIG. 5 is a SSNMR spectrum of SAPO-34 catalyst containing various hydrocarbons and alkylated single ring aromatics within the porous framework at various conditions.

Detailed Description of the Invention

Silicoaluminophosphate (SAPO) molecular sieves serve as particularly
30 desirable catalytic materials in converting oxygenate feedstocks to olefin compositions. They are particularly good catalysts for making olefins such as ethylene and propylene from oxygenate compounds.

- 5 -

According to this invention, significant quantities of ethylene and propylene can be produced from oxygenate feedstreams using SAPO molecular sieves if hydrocarbon material is introduced into the porous framework of the silicoaluminophosphate molecular sieves under the appropriate conditions, then
5 contacted with feedstock. Once the silicoaluminophosphate molecular sieve contains a measurable quantity of a catalytically active integrated hydrocarbon co-catalyst, which may be at least one single ring aromatic compound, oxygenate contacting the silicoaluminophosphate molecular sieve at appropriate reaction conditions will be converted to form a product that has a substantial quantity of
10 ethylene and propylene relative to what has been previously achievable. The product will typically be high in ethylene content relative to propylene.

According to this invention, the catalytically active integrated hydrocarbon co-catalyst is a product of a reaction of a hydrocarbon in contact with the porous framework structure of the silicoaluminophosphate molecular sieve and the
15 silicoaluminophosphate has a catalytic activity index for methanol conversion at 250°C and 275.8 kPa of at least 2, preferably at least 5, more preferably at least 10.

This invention provides a method of making an integrated hydrocarbon co-catalyst, comprising preparing an silicoaluminophosphate molecular sieve having
20 a porous framework structure and contacting said silicoaluminophosphate with a hydrocarbon at conditions effective to form at least said integrated hydrocarbon co-catalyst within the porous framework, wherein said the silicoaluminophosphate has a catalytic activity index for methanol conversion at 250°C and 275.8 kPa of at least 2, preferably at least 5, more preferably at least 10.

25 The conditions effective to form at least the integrated hydrocarbon co-catalyst comprises contacting a hydrocarbon having a diameter less than a pore-mouth diameter of the crystalline silicoaluminophosphate molecular sieve. This contacting could comprise first contacting at a lower temperature and second contacting at a higher temperature. The difference between said higher
30 temperature and said lower temperature is at least 10°C, preferably at least 25°C. The hydrocarbon contacted in the first contacting could be different from that contacted in the second contacting.

- 6 -

The oxygenate feedstock of this invention comprises at least one organic compound which contains at least one oxygen atom, such as aliphatic alcohols, ethers, carbonyl compounds (aldehydes, ketones, carboxylic acids, carbonates, esters and the like), and the feedstock may optionally contain at least one compound containing a halide, mercaptan, sulfide, or amine, as long as the optional components do not significantly impede the performance of the catalyst. When the oxygenate is an alcohol, the alcohol can include an aliphatic moiety having from 1 to 10 carbon atoms, more preferably from 1 to 4 carbon atoms. Representative alcohols include but are not necessarily limited to lower straight and branched chain aliphatic alcohols, their unsaturated counterparts and the nitrogen, halogen and sulfur analogues of such. Examples of suitable oxygenate compounds include, but are not limited to: methanol; ethanol; n-propanol; isopropanol; C₄ - C₂₀ alcohols; methyl ethyl ether; dimethyl ether; diethyl ether; di-isopropyl ether; formaldehyde; dimethyl carbonate; dimethyl ketone; acetic acid; and mixtures thereof. Preferred oxygenate compounds are methanol, dimethyl ether, or a mixture thereof.

The method of making the preferred olefin product in this invention can include the process of making these compositions from hydrocarbons such as oil, coal, tar sand, shale, biomass and natural gas. Methods for making the compositions are known in the art. These methods include fermentation to alcohol or ether, making synthesis gas, then converting the synthesis gas to alcohol or ether. Synthesis gas can be produced by known processes such as steam reforming, autothermal reforming and partial oxidization.

One or more inert diluents may be added with the feedstock, for example, in an amount of from 1 to 99 molar percent, based on the total number of moles of all feed and diluent components fed to the reaction zone. For purposes of this invention, diluents are inert compositions that do not participate in the oxygenate conversion reaction, i.e., they are neither created nor consumed. Typical diluents include helium, argon, nitrogen, carbon monoxide, carbon dioxide, water, and mixtures thereof. The preferred diluents are water and nitrogen. Water can be injected in either liquid or vapor form.

- 7 -

Hydrocarbons other than oxygenates can also be included as part of the feedstock, i.e., as co-feed. These hydrocarbons can include olefins, paraffins, alkylaromatics, aromatics or mixtures thereof. Preferred hydrocarbon co-feeds include, butylene, pentylene, C_4^+ , C_5^+ , and mixtures thereof. More preferred as a
5 co-feed is C_4^+ , with the most preferred being C_4^+ which is obtained from separation and recycle of reactor product.

The silicoaluminophosphate molecular sieves of this invention comprise a three-dimensional microporous crystal framework structure of $[SiO_2]$, $[AlO_2]$ and $[PO_2]$ tetrahedral units. The way Si is incorporated into the structure can be
10 determined by ^{29}Si MAS NMR. See Blackwell and Patton, *J. Phys. Chem.*, 92, 3965 (1988). The desired SAPO molecular sieves will exhibit one or more peaks in the ^{29}Si MAS NMR, with a chemical shift $\delta(Si)$ in the range of -88 to -94 ppm and with a combined peak area in that range of at least 20% of the total peak area of all peaks with a chemical shift $\delta(Si)$ in the range of -88 ppm to -115 ppm,
15 where the $\delta(Si)$ chemical shifts refer to external tetramethylsilane (TMS).

Silicoaluminophosphate molecular sieves are generally classified as being microporous materials having 8, 10, or 12 membered ring structures. These ring structures can have an average pore size ranging from 3.5 angstroms to 15 angstroms. Preferred are the small pore SAPO molecular sieves having an
20 average pore size ranging from 3.5 angstroms to 5 angstroms, more preferably from 4.0 angstroms to 5.0 angstroms. These preferred pore sizes are typical of molecular sieves having 8 membered rings.

In general, silicoaluminophosphate molecular sieves comprise a molecular framework of corner-sharing $[SiO_2]$, $[AlO_2]$, and $[PO_2]$ tetrahedral units. This
25 type of framework is effective in converting various oxygenates into olefin products.

The $[PO_2]$ tetrahedral units within the framework structure of the silicoaluminophosphate molecular sieve of this invention can be provided by a variety of compositions. Examples of these phosphorus-containing compositions
30 include phosphoric acid, organic phosphates such as triethyl phosphate, and aluminophosphates. The phosphorous-containing compositions are mixed with

reactive silicon and aluminum-containing compositions under the appropriate conditions to form the silicoaluminophosphate molecular sieve.

The $[\text{AlO}_2]$ tetrahedral units within the framework structure can be provided by a variety of compositions. Examples of these aluminum-containing compositions include aluminum alkoxides such as aluminum isopropoxide, aluminum phosphates, aluminum hydroxide, sodium aluminate, and pseudoboehmite. The aluminum-containing compositions are mixed with reactive silicon and phosphorus-containing compositions under the appropriate conditions to form the silicoaluminophosphate molecular sieve.

10 The $[\text{SiO}_2]$ tetrahedral units within the framework structure can be provided by a variety of compositions. Examples of these silicon-containing compositions include silica sols and silicium alkoxides such as tetra ethyl orthosilicate. The silicon-containing compositions are mixed with reactive aluminum and phosphorus-containing compositions under the appropriate conditions to form the silicoaluminophosphate molecular sieve.

15 Substituted SAPOs can also be used in this invention. These compounds are generally known as MeAPSOs or metal-containing silicoaluminophosphates. The metal can be alkali metal ions (Group IA), alkaline earth metal ions (Group IIA), rare earth ions (Group IIIB, including the lanthanoid elements: lanthanum, cerium, praseodymium, neodymium, samarium, europium, gadolinium, terbium, dysprosium, holmium, erbium, thulium, ytterbium and lutetium; and scandium or yttrium) and the additional transition cations of Groups IVB, VB, VIB, VIIB, VIIIB, and IB.

25 Preferably, the Me represents atoms such as Zn, Mg, Mn, Co, Ni, Ga, Fe, Ti, Zr, Ge, Sn, and Cr. These atoms can be inserted into the tetrahedral framework through a $[\text{MeO}_2]$ tetrahedral unit. The $[\text{MeO}_2]$ tetrahedral unit carries a net electric charge depending on the valence state of the metal substituent. When the metal component has a valence state of +2, +3, +4, +5, or +6, the net electric charge is between -2 and +3. Incorporation of the metal component is typically accomplished adding the metal component during synthesis of the silicoaluminophosphate molecular sieve. However, post-synthesis ion exchange can also be used.

30

Suitable silicoaluminophosphate molecular sieves include SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures thereof.

5 Preferred are SAPO-18, SAPO-34, SAPO-35, SAPO-44, and SAPO-47, particularly SAPO-18 and SAPO-34, including the metal containing forms thereof, and mixtures thereof. As used herein, the term mixture is synonymous with combination and is considered a composition of matter having two or more components in varying proportions, regardless of their physical state.

10 The silicoaluminophosphate molecular sieves are synthesized by hydrothermal crystallization methods generally known in the art. See, for example, U.S. Pat. Nos. 4,440,871; 4,861,743; 5,096,684; and 5,126,308. A reaction mixture is formed by mixing together reactive silicon, aluminum and phosphorus components, along with at least one template. Generally the mixture
15 is sealed and heated, preferably under autogenous pressure, to a temperature of at least 100°C, preferably from 100°C to 250°C, until a crystalline product is formed. Formation of the crystalline product can take anywhere from around 2 hours to as much as 2 weeks. In some cases, stirring or seeding with crystalline material will facilitate the formation of the product.

20 Typically, the silicoaluminophosphate molecular sieve product will be formed in solution. It can be recovered by standard means, however, such as by centrifugation or filtration. The product can also be washed, recovered by the same means and dried.

As a result of the crystallization process, the recovered sieve contains
25 within its pores at least a portion of the template used in making the initial reaction mixture. The crystalline structure essentially wraps around the template, and the template must be removed to obtain catalytic activity. Once the template is removed, the crystalline structure that remains has what is typically called an intracrystalline pore system.

30 The SAPO molecular sieve can contain one or more templates. Templates are structure directing agents, and typically contain nitrogen, phosphorus, oxygen, carbon, hydrogen or a combination thereof, and can also contain at least one alkyl

or aryl group, with 1 to 8 carbons being present in the alkyl or aryl group.

Mixtures of two or more templates can produce mixtures of different sieves or predominantly one sieve where one template is more strongly directing than another.

- 5 Representative templates include tetraethyl ammonium salts, cyclopentylamine, aminomethyl cyclohexane, piperidine, triethylamine, cyclohexylamine, tri-ethyl hydroxyethylamine, morpholine, dipropylamine (DPA), pyridine, isopropylamine and combinations thereof. Preferred templates are triethylamine, cyclohexylamine, piperidine, pyridine, isopropylamine, 10 tetraethyl ammonium salts, and mixtures thereof. The tetraethylammonium salts include tetraethyl ammonium hydroxide (TEAOH), tetraethyl ammonium phosphate, tetraethyl ammonium fluoride, tetraethyl ammonium bromide, tetraethyl ammonium chloride, tetraethyl ammonium acetate. Preferred tetraethyl ammonium salts are tetraethyl ammonium hydroxide and tetraethyl ammonium 15 phosphate.

- As is known in the art, molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve, must be activated prior to use in a catalytic process. As used herein the activation of a molecular sieve or a catalyst containing the silicoaluminophosphate molecular sieve means that template is 20 removed from the porous structure of the silicoaluminophosphate molecular sieve, leaving active catalytic sites with the microporous channels of the silicoaluminophosphate molecular sieve open for contact with feed. The activation process is typically accomplished by calcining, or essentially heating the template at a temperature of from 200°C to 800°C in the presence of an 25 oxygen-containing gas. In some cases, it may be desirable to heat in an environment having a low oxygen concentration. This type of process can be used for partial or complete removal of the template from the intracrystalline pore system. In other cases, particularly with smaller templates, complete or partial removal from the sieve can be accomplished by conventional desorption processes 30 such as those used in making standard zeolites.

Once the template has been removed from the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular

sieve, hydrocarbon material is contacted with the silicoaluminophosphate molecular sieve in a pretreatment zone. The pretreatment zone is operated at conditions effective to form an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound within the silicoaluminophosphate molecular sieve. After the an integrated hydrocarbon co-catalyst has been formed, the silicoaluminophosphate molecular sieve is contacted with oxygenate feedstock in a reaction zone under conditions effective to convert the oxygenate to an olefin-containing product. Once the catalyst is pretreated and the an integrated hydrocarbon co-catalyst is formed within the pore structure of the silicoaluminophosphate molecular sieve, it can be allowed to stand for some time in the absence of hydrocarbon or oxygenate feed. It is preferable, however, to maintain the pretreated catalyst in an inert environment if there is to be an extended time before the pretreated catalyst is contacted with oxygenate feed.

The hydrocarbon material contacted with and introduced into the silicoaluminophosphate molecular sieve must be small enough to be adsorbed into the porous framework structure of the silicoaluminophosphate molecular sieve. In general, the hydrocarbon material will comprise at least one hydrocarbon compound which has a kinetic diameter less than the size of the pore mouth opening of the SAPO molecular sieve.

The hydrocarbon material that is contacted with or introduced into the silicoaluminophosphate molecular sieve must be capable of being converted to an integrated hydrocarbon co-catalyst which may be a single ring aromatic compound. The desired aromatic composition can be identified by Solid State Nuclear Magnetic Resonance (SSNMR) spectra comprising a peak in the 18 ppm to 40 ppm region and a peak in the 120 ppm to 150 ppm region. Preferably, the aromatic composition is selected from the group consisting of alkyl substituted, single ring aromatics. Alternatively, if the intensity of the peak in the 18 ppm to 40 ppm region is negligible, a single peak near 128 ppm also indicates a useful material of this invention, as this indicates the presence of benzene. Benzene also has the desired effect on catalytic activity, as it rapidly reacts with the oxygenate to make alkylated single ring aromatics.

Preferably the an integrated hydrocarbon co-catalyst which may be a single ring aromatic within the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve will exhibit a ratio of the intensity of the peak in the 18 ppm to 40 ppm region to the intensity of the peak in the 120 ppm to 150 ppm region of not greater than 1.0. More preferably, the an integrated hydrocarbon co-catalyst which may be a single ring aromatic within the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve will exhibit a ratio of the intensity of the peak in the 18 ppm to 40 ppm region to the intensity of the peak in the 120 ppm to 150 ppm region of between 0.15 and 0.7.

It is desirable that the an integrated hydrocarbon co-catalyst which may be a single ring aromatic compound be present within the porous structure of the silicoaluminophosphate molecular sieve in an amount effective to enhance the conversion of oxygenate feed to olefin product, particularly at a concentration effective to enhance selectivity to ethylene and/or propylene. The an integrated hydrocarbon co-catalyst which may be a single ring aromatic can be part of a hydrocarbon composition within the porous structure of the silicoaluminophosphate molecular sieve, and the hydrocarbon composition comprising the an integrated hydrocarbon co-catalyst which may be a single ring aromatic will be present at 0.1 wt% to 23 wt% based on the total weight of the silicoaluminophosphate molecular sieve.

Hydrocarbon is introduced into the silicoaluminophosphate molecular sieve by contacting the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve with hydrocarbon in a pretreatment zone at conditions effective to form a composition comprising an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound within the molecular pore structure of the silicoaluminophosphate molecular sieve. Within the pretreatment zone the conditions are such that an amount of an integrated hydrocarbon co-catalyst which may be a single ring aromatic will be formed within the silicoaluminophosphate molecular sieve pore structure that is effective in enhancing selectivity to ethylene or propylene in an oxygenate to olefin reaction process. The activity of a pretreated catalyst for

oxygenate conversion can be expected to increase by a factor of at least 20% relative to an untreated catalyst. The selectivity to ethylene or propylene of a pretreated catalyst in the oxygenate conversion reaction can be expected to increase by at least 2 wt. %. Preferably, the an integrated hydrocarbon co-catalyst
5 which may be a single ring aromatic will occupy at least 0.1 vol.% of the pore structure; more preferably, at least 10 vol.%; most preferably, at least 25 vol.%. the molecular pore structure olefin will not be produced.

In general, the temperature in the pretreatment zone will be less than the temperature in the reaction zone. Desirably, there will be a temperature
10 differential between the reaction zone and the pretreatment zone of greater than or equal to 10°C, preferably greater than or equal to 25°C, more preferably greater than or equal to 50°C, most preferably greater than or equal to about 100°C.

In a preferred embodiment, the temperature in the pretreatment in the pretreatment zone will be not greater than 450°C, more preferably not greater than
15 400°C, most preferably not greater than 350°C. The preferred range of operation in the pretreatment zone is between 150°C and 450°C, more preferably between 200°C and 400°C, most preferably between 250°C and 350°C.

The pretreatment zone can be contained in a separate pretreatment vessel or within a reactor vessel where the catalytic conversion of oxygenate to olefin
20 takes place. In a preferred embodiment, a separate pretreatment vessel will be used. Typically, the pretreatment vessel will be an auxiliary fluidized bed reactor associated with the oxygenate conversion reactor and regenerator system. The auxiliary reactor is capable of continuously receiving catalyst from the regenerator and subsequently supplying pretreated catalyst to the oxygenate conversion
25 reactor.

When pretreatment is carried out within the same vessel where the catalytic conversion of oxygenate to olefin takes place, two separate temperature zones should be maintained in order to get proper introduction of hydrocarbon and formation of an integrated hydrocarbon co-catalyst which may be at least one
30 single ring aromatic compound in the silicoaluminophosphate molecular sieve. This can be accomplished by introducing the catalyst to be pretreated into one

zone of the oxygenate conversion reactor at one set of conditions in the absence of feed oxygenate, and subsequently introducing the pretreated catalyst and any unreacted pretreating hydrocarbon into an oxygenate conversion zone in fluid communication with the pretreatment zone. The feed oxygenate is then
5 introduced to the oxygenate conversion zone at conditions to effect the oxygenate conversion reaction. Different conditions in the two zones may be maintained through control of the conditions at which the catalyst and feeds are introduced, including temperature, pressure or phase. Optionally, each zone may comprise heating or cooling functions such as steam or cooling water coils.

10 After pretreatment, the silicoaluminophosphate molecular sieve or catalyst containing the silicoaluminophosphate molecular sieve is contacted with feed containing an oxygenate, and optionally a diluent or a co-feed, at process conditions effective to produce an olefin-containing product. The oxygenate to olefin reaction is carried out in a reaction zone, and the reaction zone is contained
15 within a catalytic reactor.

Typically, the oxygenate feed is contacted with the catalyst when the oxygenate is in a vapor phase. Alternately, the process may be carried out in a liquid or a mixed vapor/liquid phase. When the process is carried out in a liquid phase or a mixed vapor/liquid phase, different conversions and selectivities of
20 feed-to-product may result depending upon the catalyst and reaction conditions.

Olefins can generally be produced at a wide range of temperatures. An effective operating temperature range can be from about 200°C to 700°C. At the lower end of the temperature range, the formation of the desired olefin products may become markedly slow. At the upper end of the temperature range, the
25 process may not form an optimum amount of product. In this invention, however, the oxygenate to olefin reaction process will be carried out at a temperature differential between the reaction zone and the pretreatment zone of greater than or equal to 10°C. Preferably, the reaction process will be carried out at a temperature range between 350°C and 600°C, most preferably between 400°C and 550°C.

30 Examples of reactors which can be used in this invention include fluid bed reactors and concurrent riser reactors as described in "Free Fall Reactor," *Fluidization Engineering*, D. Kunii and O. Levenspiel, Robert E. Krieger

Publishing Co. NY, 1977. Additionally, countercurrent free fall reactors may be used in the conversion process as described in U.S. Pat. No. 4,068,136 and "Riser Reactor," *Fluidization and Fluid-Particle Systems*, pages 48-59, F.A. Zenz and D. F. Othmo, Reinhold Publishing Corp., NY 1960.

5 When the reactor is a fluidized bed reactor, it is preferred that the reactor have a riser region and a dense fluid bed section. In this embodiment, the regenerated catalyst can be returned to the portion of the reactor above the dense phase region, immediately below the dense phase region, or anywhere between about the top one fourth of the riser region and the bottom one fourth of the dense
10 phase region.

 The reaction can take place at a weight hourly space velocity (WHSV) of from 1 hr^{-1} to 1000 hr^{-1} . According to this invention, WHSV is defined as the weight of oxygenate, and any hydrocarbon which may be optionally added with the feed, per hour per weight of the silicoaluminophosphate molecular sieve
15 content of the catalyst. Preferred reactors are co-current riser reactors and short contact time countercurrent free-fall reactors in which an oxygenate feedstock can be contacted with a molecular sieve catalyst at a WHSV of at least 20 hr^{-1} , preferably in the range of from 20 hr^{-1} to 500 hr^{-1} , and most preferably in the range of from 20 hr^{-1} to 250 hr^{-1} . Because the catalyst or the feedstock may
20 contain other materials which act as inerts or diluents, the WHSV is calculated on the weight basis of the oxygenate feed, and any hydrocarbon which may be present, and the silicoaluminophosphate molecular sieve contained in the catalyst.

 Effective pressures for both the pretreatment and the reaction process range from 0.7 kPa to 3450 kPa. Preferred pressures are in the range of 69 kPa to
25 1725 kPa, with the most preferred range being of from 103 kPa to 1380 kPa. The foregoing pressures are inclusive of any inert diluent or additional hydrocarbon component, as well as the oxygenate compounds and/or mixtures thereof with hydrocarbon.

 The residence time of the feed in the reaction zone may vary from
30 fractions of a second to a number of hours, determined largely by the reaction temperature, the pressure, the silicoaluminophosphate molecular sieve catalyst

selected, the WHSV, the phase (liquid or vapor), and the process design characteristics.

In the process of this invention, all or part of the catalyst suffers deactivation as a result of carbonaceous deposits forming on the catalyst during the olefin conversion reaction. The catalyst is, therefore, periodically regenerated by contacting it with a regeneration medium to remove all or part of such carbonaceous deposits. This regeneration may occur periodically within the reactor by ceasing the flow of feed to the reactor, introducing a regeneration medium, ceasing flow of the regeneration medium, and then reintroducing the feed to the fully or partially regenerated catalyst. Regeneration preferably occurs periodically or continuously outside the reactor by removing a portion of the deactivated catalyst to a separate regenerator, and subsequently reintroducing the regenerated catalyst to the reactor. Periodic regeneration may occur at times and conditions needed to maintain a level of activity of the entire catalyst within the reactor.

According to one of the preferred embodiments of this invention, the catalyst containing carbonaceous material is regenerated under conditions effective to obtain a regenerated catalyst having a carbonaceous content of less than 2 wt.%, preferably less than 1.5 wt.%, and most preferably less than 1.0 wt.%. Following regeneration, the catalyst is preferably sent to the pretreatment zone.

In order to make up for any catalyst loss during the regeneration or reaction process, fresh catalyst can be added. Preferably, the fresh catalyst is added to the regenerated catalyst after it is removed from the regenerator, and then both are contacted with hydrocarbon material to form a composition comprising an integrated hydrocarbon co-catalyst which may be a single ring aromatic compound. However, the fresh catalyst can be pretreated independently of the regenerated catalyst, or added directly to the reaction zone without pretreatment.

In a preferred embodiment of the continuous operation, only a portion of the catalyst is removed from the reactor and sent to the regenerator to remove the accumulated carbonaceous deposits that result during the catalytic reaction. In the regenerator, the catalyst is contacted with a regeneration medium containing

oxygen or other oxidants. Examples of other oxidants include O_3 , SO_3 , N_2O , NO , NO_2 , N_2O_5 , and mixtures thereof. It is preferred to supply O_2 in the form of air. The air can be diluted with nitrogen, CO_2 , or flue gas, and steam may be added. Desirably, the O_2 concentration in the regenerator is reduced to a controlled level
5 to minimize overheating or the creation of hot spots in the spent or deactivated catalyst. The deactivated catalyst also may be regenerated reductively with H_2 , CO , mixtures thereof, or other suitable reducing agents. A combination of oxidative regeneration and reductive regeneration can also be employed.

In essence, the carbonaceous deposits are removed from the catalyst
10 during the regeneration process, forming a regenerated catalyst. The regenerated catalyst is then sent to the pretreatment zone for forming an aromatic composition within the silicoaluminophosphate molecular sieve, although some of the regenerated catalyst can be sent directly to the reaction zone for catalytic contact with the feed. Typical regeneration temperatures are in the range of $350^\circ C$ to
15 $800^\circ C$, desirably in the range of $400^\circ C$ to $750^\circ C$. Preferably, regeneration is carried out at a temperature range of $450^\circ C$ to $700^\circ C$.

It is desirable to strip at least some of the volatile organic components which may be adsorbed onto the catalyst or located within its microporous structure prior to entering the regenerator. This can be accomplished by passing a
20 stripping gas over the catalyst in a stripper or stripping chamber, which can be located within the reactor vessel or in a separate vessel. The stripping gas can be any substantially inert medium that is commonly used. Examples of stripping gas are steam, nitrogen, helium, argon, methane, CO_2 , CO , and flue gas.

It may be desirable to cool at least a portion of the regenerated catalyst to a
25 lower temperature before it is sent to the pretreatment zone or the reaction zone. A heat exchanger located externally to the regenerator may be used to remove some heat from the catalyst after it has been withdrawn from the regenerator. When the regenerated catalyst is cooled, it is desirable to cool it to a temperature which is from $200^\circ C$ higher to $200^\circ C$ lower than the temperature of the catalyst
30 withdrawn from the reactor. More desirably, it is cooled to a temperature from $10^\circ C$ to $200^\circ C$ lower than the temperature of the catalyst withdrawn from the

reactor vessel. This cooled catalyst then may be sent to the pretreatment zone or the reaction zone, or it may be recycled back to the regenerator. Introducing the cooled catalyst into the pretreatment zone, the reaction zone or the regenerator serves to reduce the average temperature in the pretreatment zone, reaction zone
5 or regenerator.

In a preferred embodiment of the invention, an average gas superficial velocity of greater than about 1 meter per second (m/s) is maintained in the reaction zone. Preferably, the average gas superficial velocity is greater than about 2 m/s. More preferably, the average gas superficial velocity is between a
10 range of 2 m/s to 6 m/s.

As defined herein, gas superficial velocity is the volumetric flow rate of the feedstock (including oxygenate, hydrocarbon, and any diluent) divided by the cross-sectional area of reaction zone. Since feedstock is converted to olefin product while flowing through the reaction zone, the volumetric flow rate of the
15 feedstock varies throughout the reaction zone. In addition, depending upon reactor design, the cross-sectional area of the reaction zone may also vary at any given point within the reactor. Therefore, average gas superficial velocity as used herein represents the average gas superficial velocity throughout the reaction zone.

20 When the average gas superficial velocity is greater than about 1 m/s, back-mixing of gases in the reaction is minimized. This increases the selectivity to the desired light olefins, i.e., ethylene and /or propylene, and increases the approach to plug flow behavior of the gases flowing through the reaction zone. The velocity profile at a given cross section of the reaction zone is approximately
25 flat and there is little axial diffusion or back-mixing of fluid elements. Ideal plug flow behavior occurs when elements of the homogeneous fluid reactant move through a reaction zone as plugs moving parallel to the reactor axis.

In order to maintain plug flow behavior, as well as achieve relatively isothermal conditions within the reaction zone, it may be beneficial to recirculate
30 a portion of the catalyst exiting the reaction zone to recontact the feed. This recirculation may occur either within the reaction zone or outside the reaction zone. Recirculating the catalyst serves to decrease the temperature differential in

the reaction zone by absorbing a portion of the heat generated by the conversion reaction. The temperature differential of the reaction zone is the change in temperature from the inlet to the outlet of the reaction zone. The outlet is the portion of the reaction zone at which the reactants (feed, catalyst and products) pass from the reaction zone to a catalyst disengaging zone. In this preferred embodiment, the temperature differential across the reaction zone is less than 120°C, which is the practical limit of what could be considered near isothermal conditions in a continuously operating system. Preferably, the temperature differential is maintained at less than 100°C. More preferably, the temperature differential is less than 30°C.

Desirably, catalyst is recirculated to contact the feed. Preferably, the rate of catalyst, which comprises molecular sieve and other materials such as binders, fillers, etc., recirculated to contact the feed is from 1 to 100 times the total feed rate of oxygenates fed to the reactor. More preferably, the rate of catalyst recirculated to recontact the feed is from 10 to 80 times the total feed rate of oxygenates to the reactor, and most preferably from 10 to 50 times. In a process which includes a separate regenerator, at least a portion of the catalyst in the reactor is desirably removed for regeneration and circulated back to the reactor at a rate of from 0.1 times to 10 times the total feed rate of oxygenates to the reactor. Preferably, the rate of recirculation is 0.2 to 5 times the total feed rate of oxygenates to the reactor, more preferably 0.3 to 3 times. In a preferred embodiment of the invention, the catalyst from the regenerator is converted to a catalyst comprising an integrated hydrocarbon co-catalyst which may be at least one single ring aromatic compound, and the converted catalyst is sent to the oxygenate reaction zone.

It is desirable to use the olefins produced by this invention to make polyolefins, particularly polyethylene and polypropylene. The olefins produced according to this invention are particularly high in ethylene and propylene content, with a high selectivity to ethylene. The olefins products of this invention are identified by C₂-C₄ hydrocarbons, including ethylene, propylene and butylene.

The olefins produced by this invention can be easily separated, due to the low amount of undesirable by-products produced, and the separated olefins can be

- 20 -

manufactured into polyolefins. Processes for forming polyolefins from olefins are known in the art. Catalytic processes are preferred. Particularly preferred are metallocene, Ziegler/Natta and acid catalytic systems. See, for example, U.S. Patent Nos. 3,258,455; 3,305,538; 3,364,190; 5,892,079; 4,659,685; 4,076,698; 5 3,645,992; 4,302,565; and 4,243,691. In general, these methods involve contacting the olefin product with a polyolefin-forming catalyst at a pressure and temperature effective to form the polyolefin product.

A preferred polyolefin-forming catalyst is a metallocene catalyst. The preferred temperature range of operation is between 50°C and 240°C and the 10 reaction can be carried out at low, medium or high pressure, being anywhere within the range of 100 kPa to 20000 kPa. For processes carried out in solution, an inert diluent can be used, and the preferred operating pressure range is between 1000 kPa and 15,000 kPa, with a preferred temperature range of between 120°C and 230°C. For gas phase processes, it is preferred that the temperature generally 15 be within a range of 60°C to 160°C, and that the operating pressure be between 500 kPa and 5000 kPa.

This invention will be better understood with reference to the following examples, which are intended to illustrate specific embodiments within the overall scope of the invention as claimed.

20

General Experimental Procedure

(a) Catalyst Activity Index

The catalyst activity index (k/k_{ini}) for methanol conversion at 250°C and 275.8 kPa was determined using the apparatus shown schematically in FIG. 1.

25 The values of k_{ini} and k were determined as follows.

50 mg of pre-calcined and activated SAPO-34 catalyst (Si/Al = 0.19) was loaded into a Pyrex glass tube, 12 mm in o.d. by 120 mm in length. The catalyst was activated by flowing He at 450°C for 1 hour. The glass tube was attached to a vacuum line and evacuated. The catalyst was dehydrated by heating the catalyst 30 at 250°C for 1 hr in vacuo. The final pressure was generally less than 10^{-2} torr and the final temperature was 250°C.

After dehydration of the catalyst, one pulse of 3 microliter of methanol was passed through the catalyst bed and the conversion of methanol was determined by analyzing a portion of the products by gas chromatography. Subsequently, additional 3 microliter pulses of methanol were added every six minutes and the conversion methanol was determined. Assuming a first order reaction kinetics, the rate constant k_{ini} and k were proportional to $-\ln(1 - \text{conversion})$. Therefore, the catalytic activity index was determined by the following equation: $k/k_{ini} = \ln(1 - \text{conversion}) / \ln(1 - \text{conversion after first pulse of methanol})$.

10 (b) Examples

In the general procedure, SAPO-34 molecular sieve was contacted with acetone, 2-butene, and methanol, respectively. In each case, 1.0 g of calcined catalyst was loaded into a Pyrex glass tube, 12 mm in o.d. by 120 mm in length. The glass tube was attached to a vacuum line and evacuated. The catalyst was dehydrated by heating the catalyst at 200°C for 1 hr in vacuo. The final pressure was generally less than 10^{-2} torr.

After dehydration of the catalyst, the hydrocarbons were contacted with the catalyst at ambient temperature. The exact loading of the hydrocarbons was measured via a capacitance manometer with a loading of 6 wt% on CH_2 basis. The sample was then isolated from the vacuum line and heated to 300°C and the sample temperature was maintained at 300°C for 0.5 hr. The hydrocarbon content of the catalyst was determined using a LECO C-200 analyzer. Results indicate that there were about 1-3 wt% integrated hydrocarbon co-catalyst on the catalyst in each case.

25 Example 1

The silicoaluminophosphate molecular sieve generated by the experimental procedure above was analyzed using SSNMR. The SSNMR spectrum was obtained using single-pulse ^{13}C excitation, with high-power ^1H decoupling during acquisition. $\pi/2$ pulses were used for carbon signal excitation, and recycle times between pulses were 20 seconds. Typically, 200 acquisitions (or greater) were signal averaged to obtain the spectrum. Magic-angle spinning

- 22 -

speeds were typically 8 kHz. All chemical shifts are reported relative to TMS at 0 ppm, using external calibration on hexamethylbenzene (17.4 ppm vs. TMS).

The spectrum for acetone-1,2,3-¹³C used as a pretreating hydrocarbon on a SAPO-34 catalyst at 250°C and 260 torr is shown in FIG. 2. There was about 3
5 wt.% integrated hydrocarbon co-catalyst comprising carbonaceous deposits on the pretreated catalyst following evacuation of the pretreating material. The presence of resolved signals at 134-138 ppm and 19-21 ppm confirm that methyl substituted aromatics result from this preparation scheme. In particular, the spectrum demonstrates that a mixture of alkylated single ring aromatic compounds
10 exist within the silicoaluminophosphate molecular sieve. Chemical shifts for methyl groups observed at 19 and 21 ppm, and aromatic signals at 126, 129, 135 and 138 ppm, support the existence of alkylated aromatic species. Further, the relative integrated intensity of aliphatic region compared to the aromatic region is 0.366. The expected aliphatic to aromatic signal intensity ratio for
15 trimethylbenzenes is 0.500. Thus, the observed value of 0.366 is indicative of a composition in the silicoaluminophosphate molecular sieve comprising primarily xylenes and tri-methylbenzenes.

The spectra for methanol-¹³C as a pretreating hydrocarbon for a SAPO-34 catalyst is shown in FIG. 3. The top spectrum, labeled "as prepared," shows the
20 sample pretreated at 300°C and 260 torr, shortly after the evacuation of pretreating hydrocarbon in the pretreating vessel. The relatively large intensity and distribution of aliphatic signals in the 0-50 ppm region accompanied by a relatively large aliphatic to aromatic signal intensity ratio indicates the presence of substantial aliphatic molecules unattached to aromatics in the pores of the
25 silicoaluminophosphate molecular sieve, and represents the nascent product of the oxygenate conversion reaction at that temperature. The middle spectrum shows the same sample after 1 hour at 450°C in flowing helium at 275.8 kPa in the absence of any pretreating hydrocarbon or oxygenate feed. In these cases, the aliphatics unattached to single ring aromatics have been removed, revealing the
30 single ring aromatics formed in the silicoaluminophosphate molecular sieve. Longer exposure times in the absence of pretreating materials reduce the aliphatic to aromatic signal intensity ratio, e.g., in the case of the middle spectrum to the

case of the bottom spectrum, indicative of the dealkylation of the single ring aromatic species.

Example 2

The production of light olefins was carried out by mixing 50.0 mg of a selected SAPO with 1.0 gram of silicon carbide. The resulting mixture was then placed in a 12.7 mm (outside diameter) No. 304 stainless steel tubular reactor having a wall thickness of 1.6 mm. The tubular reactor was wrapped with electrical heating tape. A thermocouple was provided in direct contact with the catalyst for temperature measurement.

Pure methanol feedstock was introduced to the tubular reactor by means of a Valco four-port injection valve with a fixed volume of 3 μ l concurrently with a stream of helium diluent. The pressure and temperature employed in the example were 275.8 kPa and 450°C, respectively. The effluent from the tubular reactor following each pulse of methanol was collected using a Valco six-port valve with a 2 ml sample loop. The collected effluent sample was analyzed by gas chromatography (Hewlett Packard 6890) equipped with a flame ionization detector. The chromatographic column used was a 150 meter, 0.25 mm (i.d.) fused silica capillary column (Model No. Petrocol DH 150). In between the 3 μ l pulses of methanol feedstock, 50 ml/min of pure helium was run through the reactor at the same conditions. Each point shown in FIGs. 3 and 4 represents the results of the oxygenate conversion reaction for every fifth consecutive pulse of methanol feedstock across the catalysts examined.

FIG. 4 shows the extent of conversion in an oxygenate conversion reaction with methanol feed at 450°C and 275.8 kPa and WHSV of 25 hr^{-1} utilizing the catalyst prepared from acetone in Example 1, compared to the same SAPO-34 molecular sieve which does not contain alkylated single ring aromatic compounds at the same oxygenate conversion reaction conditions. The increase in activity for methanol conversion for the catalyst of the invention is seen at the initial stages of the reaction.

FIG. 5 shows the selectivity to C_2 - C_4 olefins in the same experiment as described for FIG. 5. The increase in prime olefin selectivity for methanol

conversion for the catalyst of the invention, particularly the increase in ethylene selectivity, is shown to be about 10 wt.% or greater at any point in the experiment.

Table 1 shows the catalytic activity increase after the SAPO-34 molecular sieve was loaded with a carbonaceous material.

5

Table 1.

Pretreatment	Activity Increase, k/k_{ref}	Hydrocarbon Material (wt.%)
One pulse of 3 μl methanol at 250°C	1	---
30 pulses of 3 μl methanol at 250°C	45	---
90 pulses of 3 μl methanol at 250°C	115	---
25 pulses of 100 μl propene at 350°C	38	1.9
25 pulses of 100 μl 1-butene at 350°C	67	---
4 pulses of 100 μl 1-butene at 450°C	9	---
5 pulses of 100 μl 1-butene at 350°C and 4 pulses of 100 μl 1-butene at 450°C	40	---
25 pulses of 100 μl 2-butene at 350°C	84	2.0
10 pulses of 1 μl 1-pentene at 350°C	36	1.1
10 pulses of 1 μl 3-hexene at 350°C	24	---

What Is Claimed:

- 1 1. A crystalline silicoaluminophosphate molecular sieve comprising a porous
2 framework structure and a catalytically active integrated hydrocarbon co-catalyst,
3 wherein the silicoaluminophosphate has a catalytic activity index for
4 methanol conversion at 250°C of at least 2.
- 1 2. A crystalline silicoaluminophosphate molecular sieve comprising a porous
2 framework structure and a catalytically active integrated hydrocarbon co-catalyst,
3 wherein the catalytically active integrated hydrocarbon co-catalyst is a
4 product of a reaction of a hydrocarbon in contact with the porous framework.
- 1 3. The crystalline silicoaluminophosphate molecular sieve of claim 1,
2 wherein the catalytically active integrated hydrocarbon co-catalyst is a product of
3 a reaction of any hydrocarbon having a diameter less than a pore-mouth diameter
4 of the crystalline silicoaluminophosphate molecular sieve in contact with the
5 porous framework structure.
- 1 4. The crystalline silicoaluminophosphate molecular sieve of claim 3,
2 wherein the hydrocarbon comprises an oxygenate.
- 1 5. The crystalline silicoaluminophosphate molecular sieve of any of the
2 preceding claims, wherein the silicoaluminophosphate has a catalytic activity
3 index for methanol conversion at 250°C of at least 10.
- 1 6. The crystalline silicoaluminophosphate molecular sieve of any of the
2 preceding claims, wherein the catalytically active integrated hydrocarbon co-
3 catalyst comprises 0.1 to 23 weight percent single ring aromatics.
- 1 7. The crystalline silicoaluminophosphate molecular sieve of any of the
2 preceding claims, wherein the catalytically active integrated hydrocarbon co-
3 catalyst is remains active after being exposed to air at room temperature for 12
4 hours or after being subjected to heating at 450°C for 0.5 hour.

- 1 8. The crystalline silicoaluminophosphate molecular sieve of any of the
2 preceding claims, wherein the silicoaluminophosphate molecular sieve is selected
3 from the group consisting of SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17,
4 SAPO-18, SAPO-20, SAPO-31, SAPO-34, SAPO-35, SAPO-36, SAPO-37,
5 SAPO-40, SAPO-41, SAPO-42, SAPO-44, SAPO-47, SAPO-56, the metal
6 containing forms thereof, and mixtures thereof.
- 1 9. A catalyst for converting an oxygenate feedstock to an olefin product
2 comprising a crystalline silicoaluminophosphate molecular sieve of any of the
3 preceding claims and a binder.
- 1 10. A method of making an olefin product from an oxygenate feedstock,
2 comprising:
3 contacting a silicoaluminophosphate molecular sieve having a porous
4 framework structure with a hydrocarbon at conditions effective to form at least a
5 integrated hydrocarbon co-catalyst within the porous framework, and
6 contacting the silicoaluminophosphate molecular sieve containing the
7 integrated hydrocarbon co-catalyst with an oxygenate feedstock under conditions
8 effective to convert the feedstock to the olefin product,
9 wherein the silicoaluminophosphate has a catalytic activity index for
10 methanol conversion at 250°C of at least 2.
- 1 11. The method of claim 10, wherein the silicoaluminophosphate has a
2 catalytic activity index for methanol conversion at 250°C of at least 10.
- 1 12. The method of claim 10 or claim 11, wherein the catalytically active
2 integrated hydrocarbon co-catalyst is a product of a reaction of any hydrocarbon
3 having a diameter less than a pore-mouth diameter of the crystalline
4 silicoaluminophosphate molecular sieve in contact with the porous framework
5 structure.
- 1 13. The method of any one of claims 10 to 12, wherein the catalytically active
2 integrated hydrocarbon co-catalyst comprises 0.1 to 23 weight percent single ring
3 aromatics.

- 27 -

1 14. The method of any one of claims 10 to 12, wherein the hydrocarbon
2 comprises an oxygenate.

1 15. The method of any one of claims 10 to 14, wherein the catalytically active
2 integrated hydrocarbon co-catalyst is remains active after being exposed to air at
3 room temperature for 12 hours or after being subjected to heating at 450°C for 0.5
4 hour.

1 16. The method of any one of claims 10 to 15, wherein the
2 silicoaluminophosphate molecular sieve is selected from the group consisting of
3 SAPO-5, SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-
4 31, SAPO-34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42,
5 SAPO-44, SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures
6 thereof.

1 17. An olefin product made according to the method of any one of claims 10
2 to 16.

1 18. A method of making an integrated hydrocarbon co-catalyst, comprising:
2 preparing an silicoaluminophosphate molecular sieve having a porous
3 framework structure and
4 contacting said silicoaluminophosphate with a hydrocarbon at conditions
5 effective to form at least said integrated hydrocarbon co-catalyst within the porous
6 framework,
7 wherein said silicoaluminophosphate comprising said integrated
8 hydrocarbon co-catalyst has a catalytic activity index for methanol conversion at
9 250°C of at least 2.

1 19. The method of claim 18, wherein said conditions effective to form at least
2 said integrated hydrocarbon co-catalyst comprises contacting a hydrocarbon
3 having a diameter less than a pore-mouth diameter of the crystalline
4 silicoaluminophosphate molecular sieve.

- 28 -

- 1 20. The method of claim 19, wherein said contacting comprises first
2 contacting at a lower temperature and second contacting at a higher temperature.
- 1 21. The method of claim 20, wherein a difference between said higher
2 temperature and said lower temperature is at least 10°C.
- 1 22. The method of claim 21, wherein a difference between said higher
2 temperature and said lower temperature is at least 25°C.
- 1 23. The method of claim 20, wherein the hydrocarbon contacted in said first
2 contacting is different from that contacted in said second contacting.
- 1 24. The method of claim 23, wherein a difference between said higher
2 temperature and said lower temperature is at least 10°C.
- 1 25. The method of claim 24, wherein a difference between said higher
2 temperature and said lower temperature is at least 25°C.
- 1 26. The method of any one of claims 19 to 25, wherein the
2 silicoaluminophosphate has a catalytic activity index for methanol conversion at
3 250°C of at least 10.
- 1 27. The method of any one of claims 19 to 26, wherein the catalytically active
2 integrated hydrocarbon co-catalyst comprises 0.1 to 23 weight percent single ring
3 aromatics.
- 1 28. The method of any one of claims 19 to 25, wherein the hydrocarbon
2 comprises an oxygenate.
- 1 29. The method of any one of claims 19 to 28, wherein the catalytically active
2 integrated hydrocarbon co-catalyst is remains active after being exposed to air at
3 room temperature for 12 hours or after being subjected to heating at 450°C for 0.5
4 hour.
- 1 30. The method of any one of claims 19 to 29, wherein the silicoalumino-
2 phosphate molecular sieve is selected from the group consisting of SAPO-5,

- 29 -

- 3 SAPO-8, SAPO-11, SAPO-16, SAPO-17, SAPO-18, SAPO-20, SAPO-31, SAPO-
- 4 34, SAPO-35, SAPO-36, SAPO-37, SAPO-40, SAPO-41, SAPO-42, SAPO-44,
- 5 SAPO-47, SAPO-56, the metal containing forms thereof, and mixtures thereof.

1/5

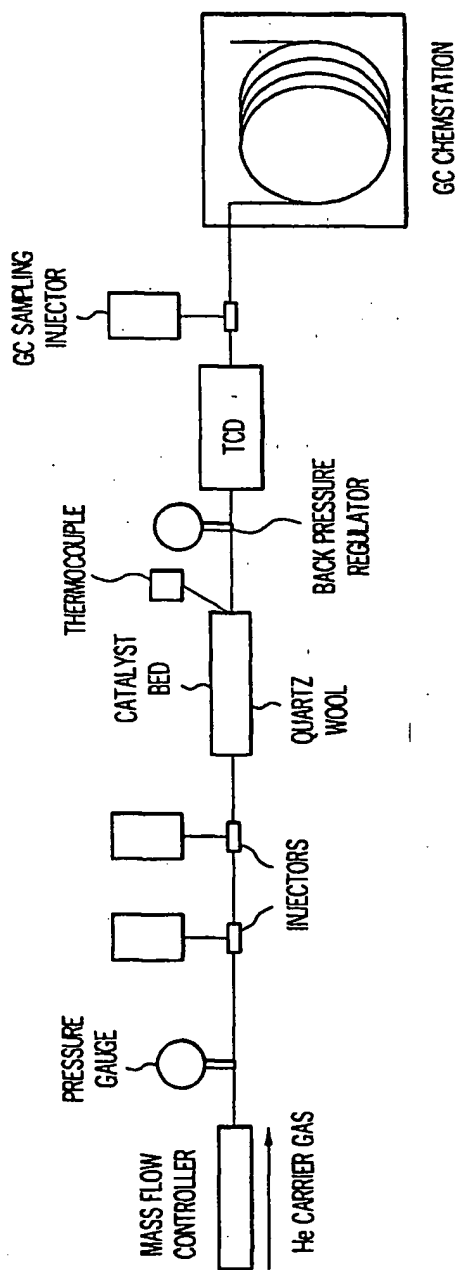


FIG. 1

2/5


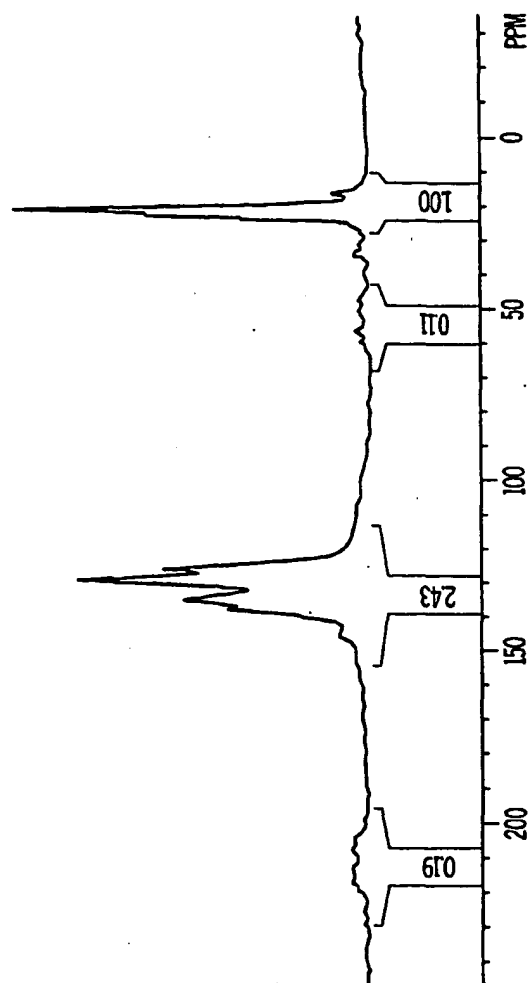


FIG. 2

3/5

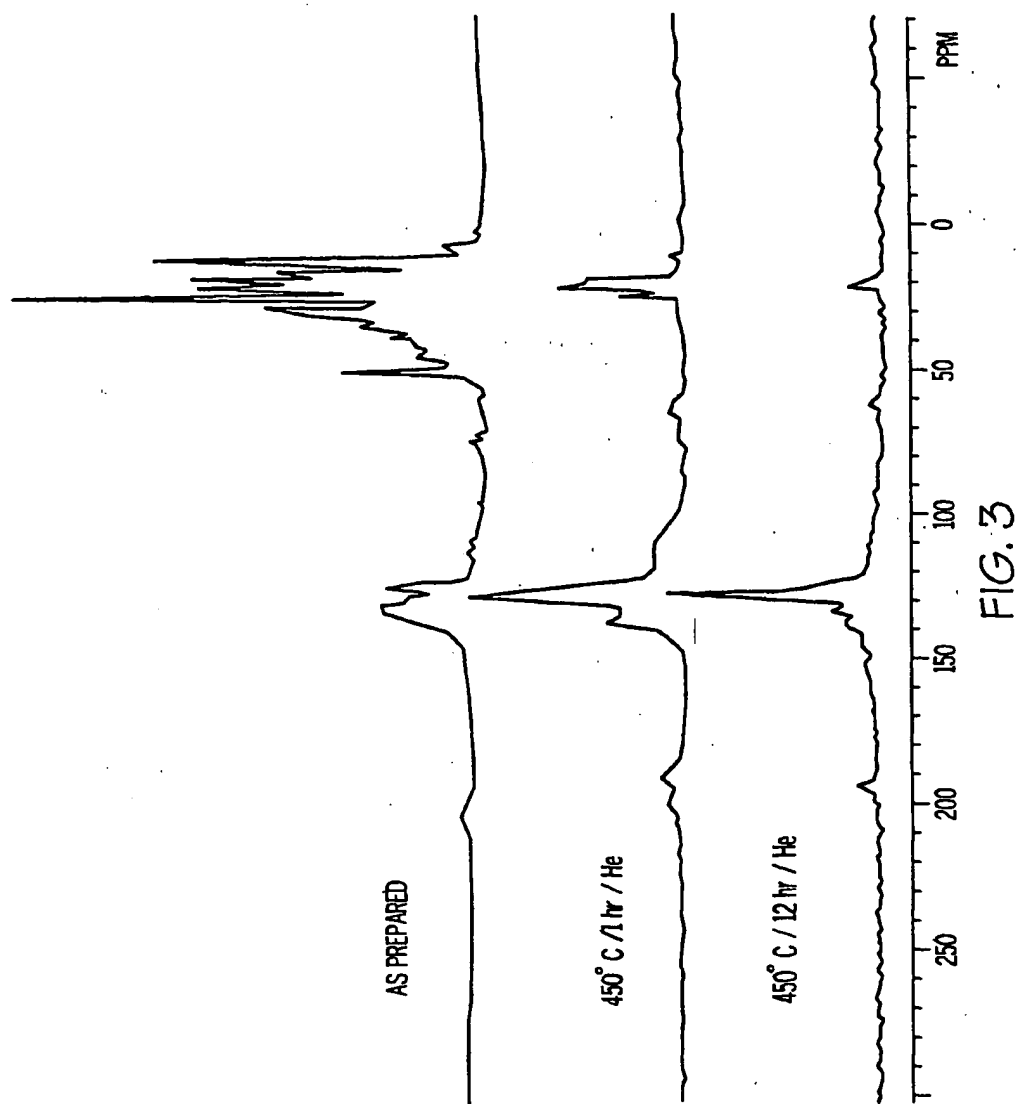

4/5

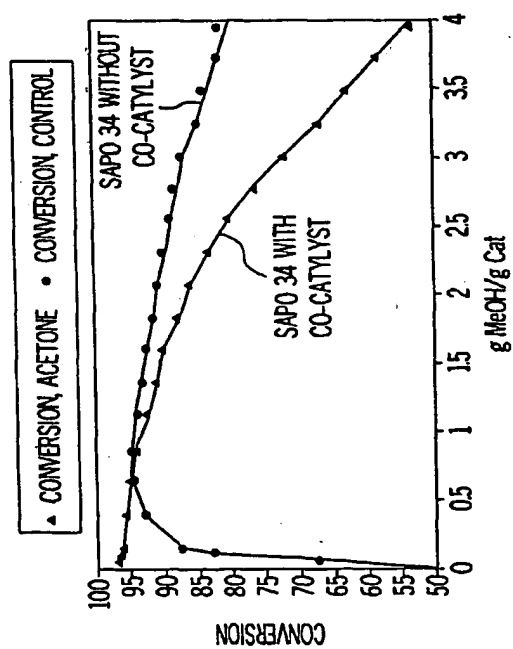


FIG. 4

5/5

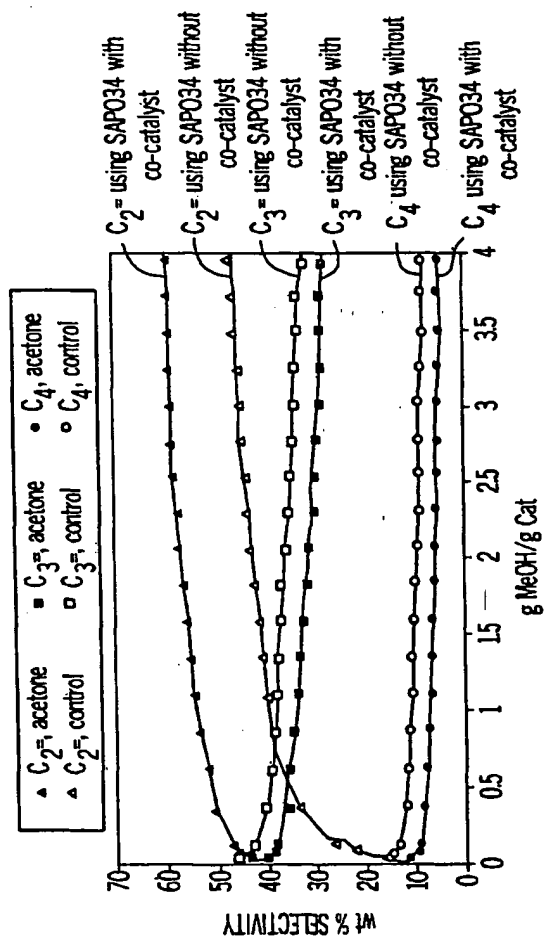


FIG. 5

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 August 2001 (30.08.2001)

PCT

(10) International Publication Number
WO 01/62382 A3

(51) International Patent Classification⁷: **B01J 29/04**,
C07C 1/20

(21) International Application Number: PCT/US01/06011

(22) International Filing Date: 23 February 2001 (23.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/511,943 24 February 2000 (24.02.2000) US
09/615,545 13 July 2000 (13.07.2000) US

(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS
INC.** [US/US]; 5200 Bayway Dr., Baytown, TX
77520-5200 (US).

(72) Inventors: **XU, Teng**; 13422 Scenic Glade Drive, Hous-
ton, TX 77059 (US). **WHITE, Jeffrey, L.**; 1239 E. Spring
Hill Court, Cary, NC 27511 (US).

(74) Agents: **KELLER, Bradley, A.**; ExxonMobil Chemical
Company, P.O. Box 2149, Baytown, TX 77522-2149 et al.
(US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE,
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN,
YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
10 January 2002

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: CATALYST PRETREATMENT IN AN OXYGENATE TO OLEFINS REACTION SYSTEM

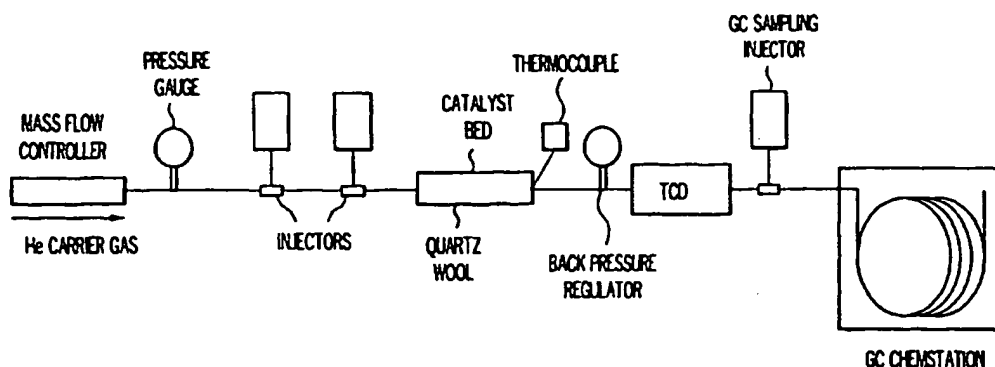

(57) Abstract: Disclosed is a crystalline silicoaluminophosphate molecular sieve comprising a porous framework structure and at least one single ring aromatic compound within the porous framework structure. The silicoaluminophosphate molecular sieve is used to convert oxygenate feedstock to olefin product. The olefin product is high in ethylene and propylene content, with a high selectivity to ethylene. The silicoaluminophosphate molecular sieve can be included with a binder and other materials in finished catalyst form.

WO 01/62382 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/06011

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B01J29/04 C07C1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 499 314 A (MOLE THOMAS ET AL) 12 February 1985 (1985-02-12) cited in the application claims 1-14; example 1	1-5,8, 10,12, 16-19,30
Y	WO 98 29363 A (EXXON CHEMICAL PATENTS INC) 9 July 1998 (1998-07-09) claims 1,4	1-5,8, 10,12, 16-19,30
A	US 6 001 328 A (KARLSSON ARNE ET AL) 14 December 1999 (1999-12-14)	
A	US 5 912 393 A (REYNOLDS THOMAS M ET AL) 15 June 1999 (1999-06-15)	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

28 August 2001

Date of mailing of the international search report

07/09/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo rd,
 Fax (+31-70) 340-3016

Authorized officer

Thion, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/06011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4499314	A	12-02-1985	NONE	
WO 9829363	A	09-07-1998	AU 731024 B	22-03-2001
			AU 5620798 A	31-07-1998
			BR 9713665 A	04-04-2000
			EP 0960085 A	01-12-1999
			NO 993229 A	31-08-1999
			US 5952538 A	14-09-1999
			ZA 9711648 A	07-12-1998
US 6001328	A	14-12-1999	NO 961033 A	20-10-1997
			AU 729506 B	01-02-2001
			AU 2413297 A	01-10-1997
			CA 2248656 A	18-09-1997
			EP 0888188 A	07-01-1999
			JP 2000506485 T	30-05-2000
			WO 9733693 A	18-09-1997
			NZ 331886 A	28-01-1999
US 5912393	A	15-06-1999	US 6207872 B	27-03-2001